

TROUGH

8


ケーブルトラフ

■ケーブルトラフ

1 種・2 種


直線用 / 曲線用

勾配用 / 分岐用

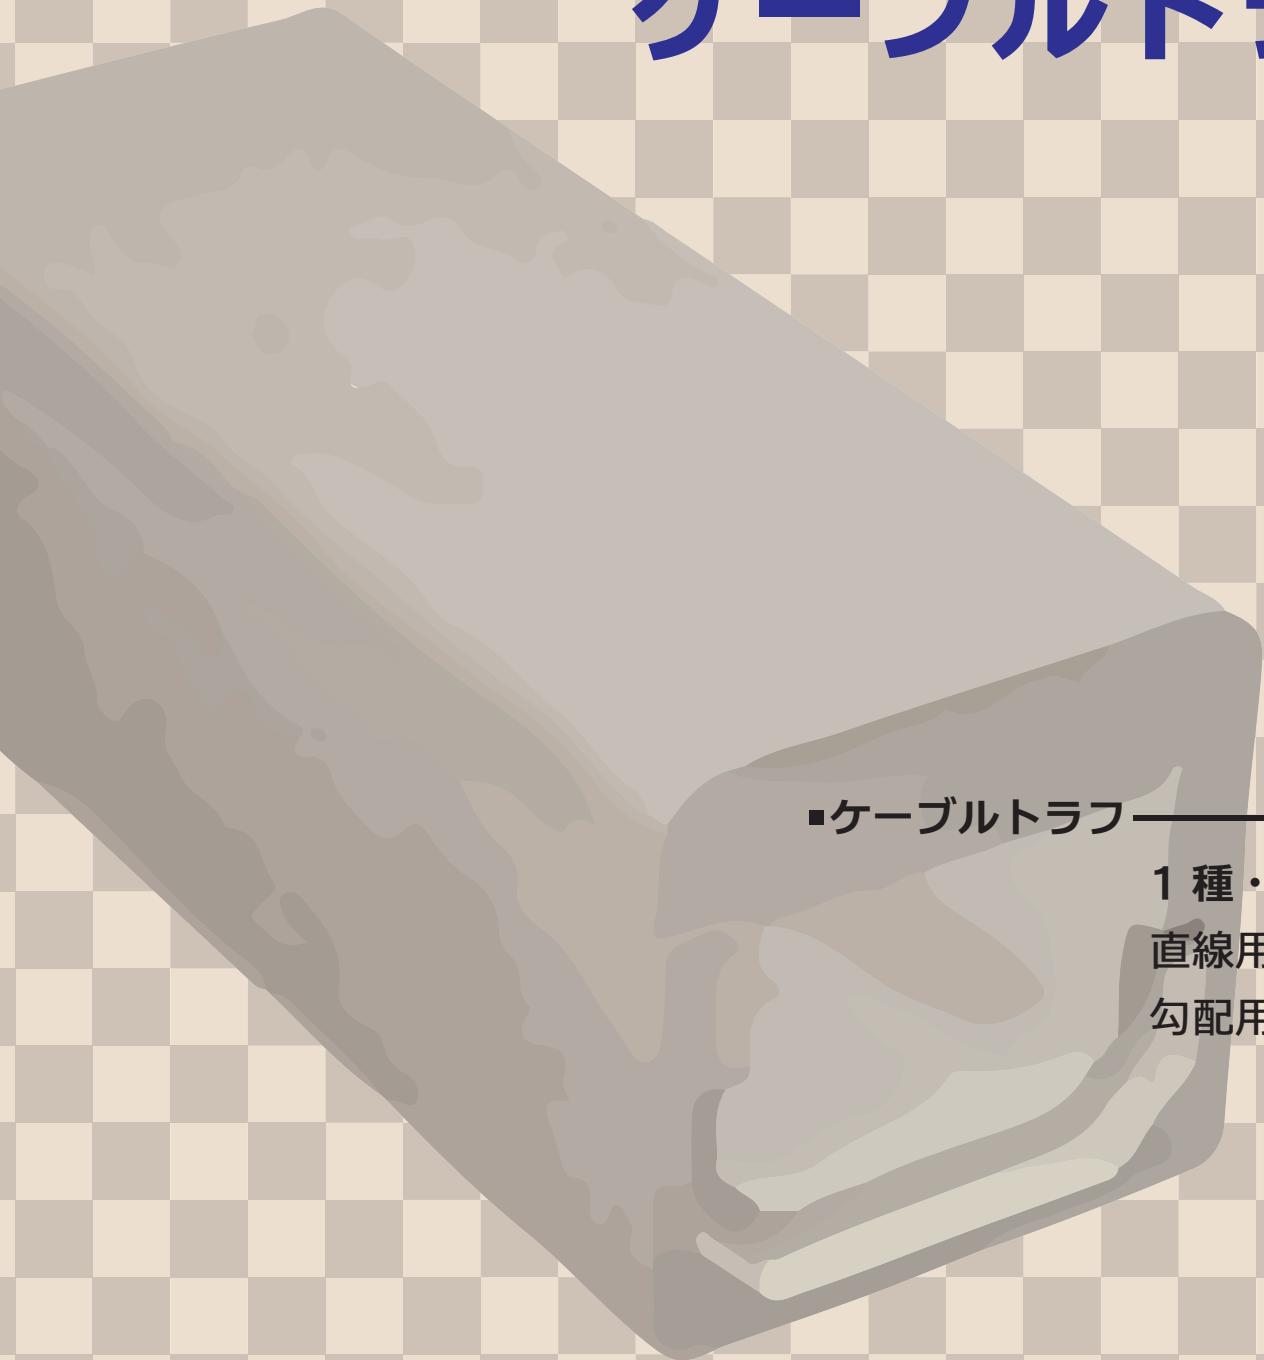

ケーブルトラフ（直線用）

形 状

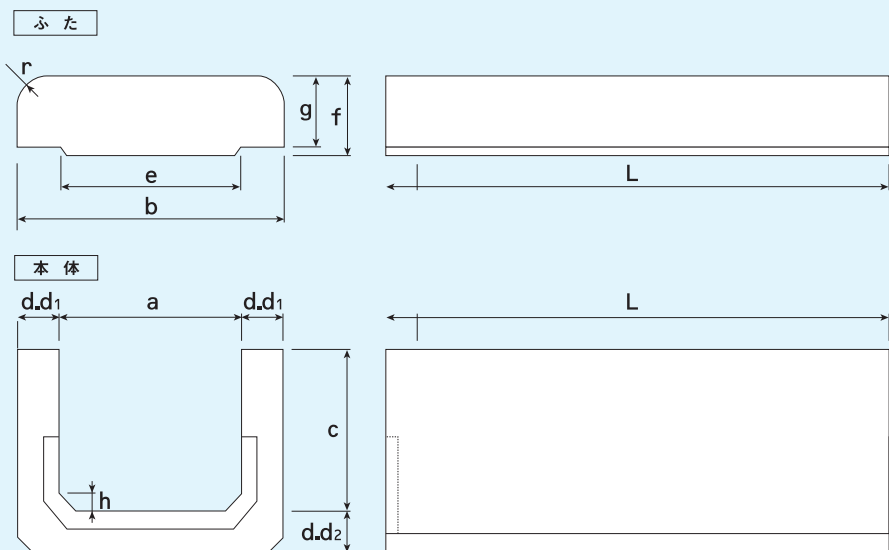

寸 法 表 [直 線 用]

単位：mm

呼び名		a	b	c	d	e	f	g	h	L	r	参考重量 (kg)	
												本体	ふた
JIS 1種	70	70	120	75	25	65	40	30	15	1000	15	16	5(×2)
	100	100	150	145		90	60	50				14	9
	120	120	170	75		115						10	11
	120C			150								15	
	150A	150	210	90	30	145			20			15	14
	150B			120								16	
	150C			200								25	
	200A			90								20	
	200B	200	270	170	26								
	200C			250	33								
	250	250	330	170	40	240			25			34	22
	300	300	390	250	45	290						38	26
	300C				47								
	330	330	430	210	50	320						55	50
	400	400	510	215	420	59			35				
	430	430	540	170		58			37				
	430C			250		70							
	550	550	670	215	60	540	70	60	50			82	55
	620	620	820	370	100	610	90	80		195	90		
許容差		±2				±3			—	±3	—		

※呼び名70の本体は、L寸法500mmも取り扱っております。 ※呼び名120～620の本体は、L寸法1,000mmも取り扱っております（L寸法の許容差は±5mmになります）。


呼び名		a	b	c	d ₁	d ₂	e	f	g	h	L	r	参考重量 (kg)	
													本体	ふた
JIS 2種	K100	100	140	107	20	23	98	35	26	15	500	15	8	4
	K130	130	170		23	128	9		5					
	K164	164	210	135	23	25	154	40	31	20			15	9
	K164C			210			19							
	K220	220	270	175	25	30	210	50	41			25	21	15
	K220C			255			30						30	
	K280	280	330	180			270			24			18	
	K280C			255						30				
	K330	330	390	180	30	35	320			29		22		
	K330C			260						36				
	K450	450	510	235			440			40		29		
	K470C	470	540	265	35	40	460			51		31		
許容差		±2				±3				—	±3	—		

※呼び名K100～K164の本体は、L寸法1,000mmも取り扱っております（L寸法の許容差は±5mmになります）。


ケーブルトラフ（曲線用）

形 状

曲線用 45°

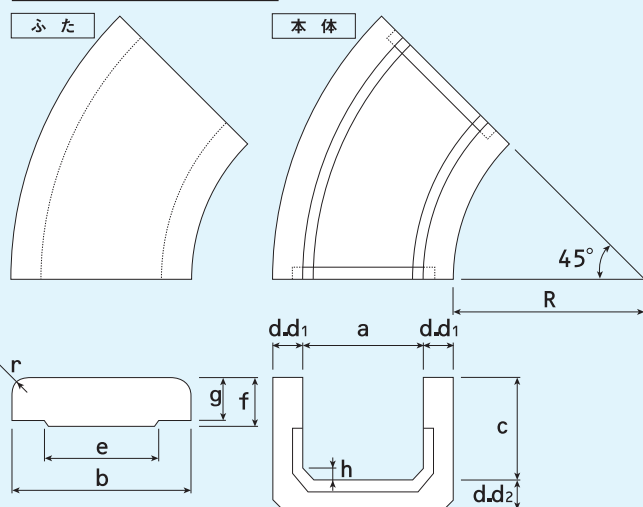

曲線用 30°

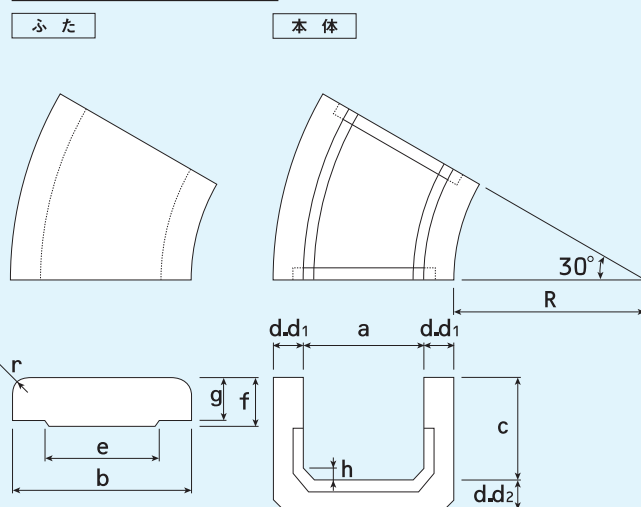

寸 法 表 [曲 線 用]

単位 : mm


呼び名		a	b	c	d	e	f	g	h	r	R		参考重量 (kg)		
											45°	30°	45°	30°	
JIS 1 種	70	70	120	75	25	65	40	30	15	15	350	350	10	6	
	100	100	150	145		90	60	50					25	—	—
	120	120	170	75		115								14	10
	120C			150		18								—	
	150A	150	210	90	30	145			20	20				13	
	150B			120						22				15	
	150C			200						27				—	
	200A	200	270	90	35	190			25	29				23	
	200B			170						34				30	
	200C			250						38				—	
	250	250	330	170	40	240			25	45				39	
	300	300	390		45	290				56				49	
	300C			250						62				55	
	330	330	430	210	50	320				—				—	
	400	400	510	215	55	390				94				78	
	430	430	540	170		420				—				—	
	430C			250						105				—	
許容差		±2				±3			—						

呼び名		a	b	c	d ₁	d ₂	e	f	g	h	r	R		参考重量 (kg)	
												45°	30°	45°	30°
JIS 2種	K100	100	140	107	20	23	98	30	21	15	15	350	500	10	8
	K130	130	170				128							11	10
	K164	164	210	135	23	25	154	40	31	20	25			18	14
	K164C			210										20	15
	K220	220	270	175	25	30	210	50	41	25	28			25	
	K220C			255							33			29	
	K280			180			270				38			30	
	K280C	280	330	255	30	35					42			34	
	K330			180			320				45			37	
	K330C			260							49			43	
	K450	450	510	235	35	40	440				68			59	
	K470C	470	540	265			460				77			65	
許容差		±2				±3			—						

※参考重量の記載のない製品は、2020年3月以降の取り扱いがありません。
 ※その他の製品も予告なく取り扱いを終了する場合があります。

ケーブルトラフ（勾配用）

形 状

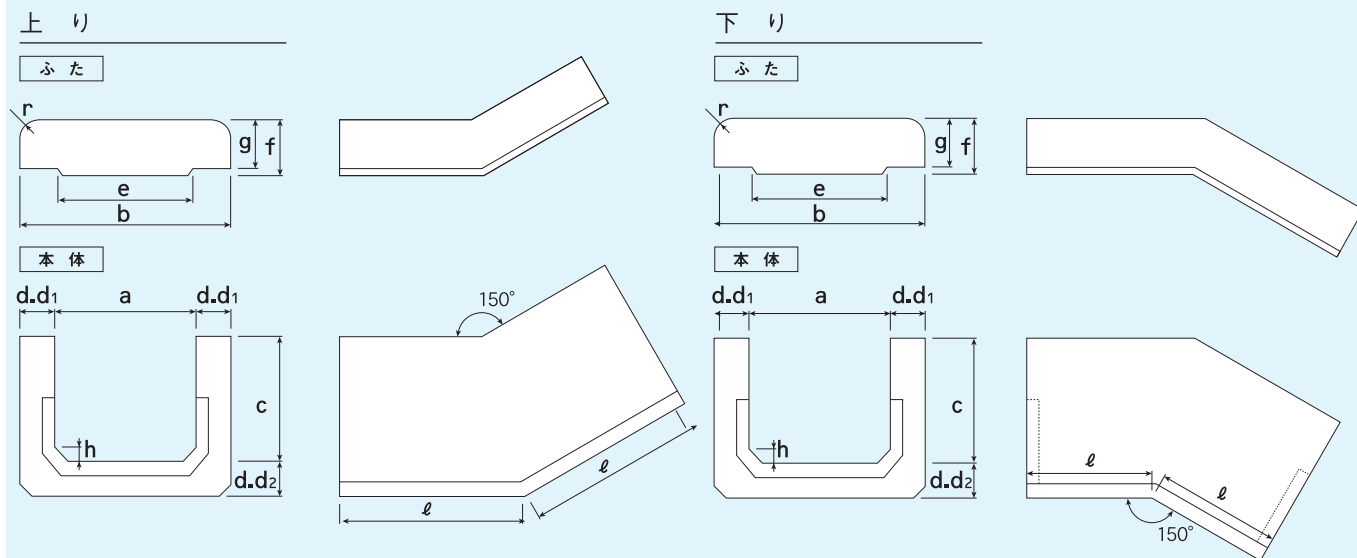

寸 法 表 [勾 配 用]

単位：mm

呼び名		a	b	c	d	e	f	g	h	r	ℓ		参考重量 (kg)	
											上り	下り	上り	下り
JIS 1種	70	70	120	75	25	65	40	30	15	15	250	150	13	12
	100	100	150	145		90	60	50		25			—	—
	120	120	170	75		115							20	20
	120C			150	18									
	150A	150	210	90	145	25			26				19	
	150B			120					27				22	
	150C			200					31				27	
	200A	200	270	90	35	190			25				33	29
	200B			170									38	34
	200C			250									42	40
	250	250	330	170	40	240			25				49	42
	300	300	390		45	290							56	53
	300C			250					60				63	
	330	330	430	210	50	320			25				—	—
	400	400	510	215	390	79							79	
	430	430	540	170		420							—	—
	430C			250	—				—					
許容差		+2				+3			—					


呼び名		a	b	c	d ₁	d ₂	e	f	g	h	r	ℓ		参考重量 (kg)	
												上り	下り	上り	下り
JIS 2種	K100	100	140	107	20	23	98	30	21	15	15	250	150	13	10
	K130	130	170		128	14	11								
	K164	164	210	135	23	25	154	40	31	20	22			18	
	K164C			210		24	22								
	K220	220	270	175	25	30	210	50	41	25	31			28	
	K220C			255							38			35	
	K280	280	330	180			270				41			35	
	K280C			255							45			39	
	K330			330			390				180			320	25
	K330C	260	48		45										
	K450	450	510	235	35	40	440	61	56						
	K470C	470	540	265			460	69	63						
許容差		±2				±3			—						

※参考重量の記載のない製品は、2020年3月以降の取り扱いがありません。
 ※その他の製品も予告なく取り扱いを終了する場合があります。


ケーブルトラフ（分岐用）

形 状

片分岐

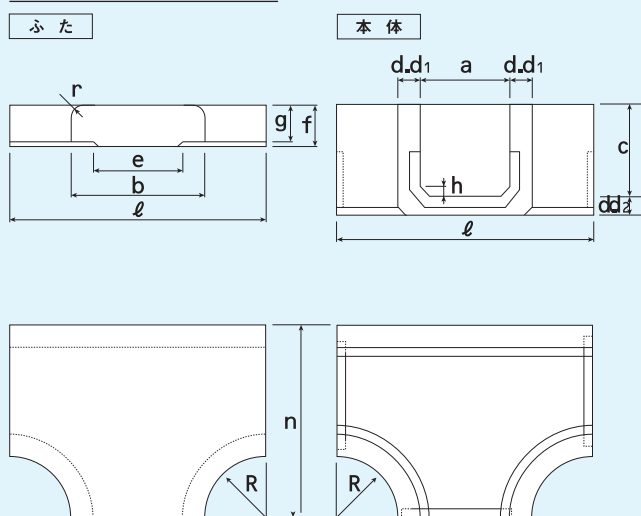

両分岐

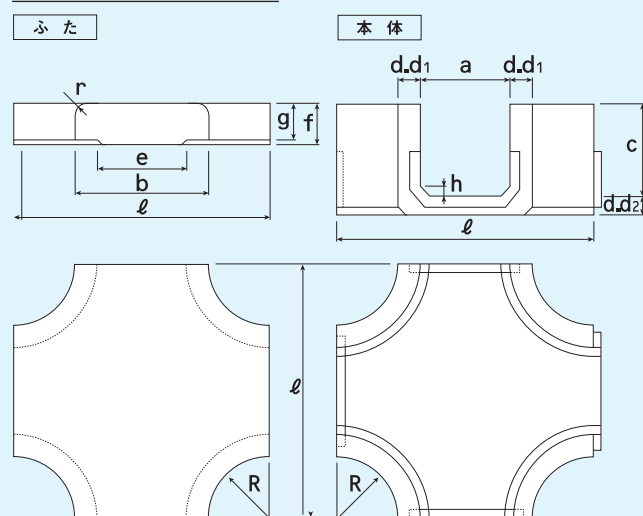

寸 法 表 [分 岐 用]

単位：mm

呼び名		a	b	c	d	e	f	g	h	r	ℓ	n	参考重量 (kg)			
													片分岐	両分岐		
JIS 1種	70	70	120	75	25	65	40	30	15	15	500	310	20	28		
	100	100	150	145		90	60	50		25		—	—			
	120	120	170	75		115						28	38			
	120C			150	—				—							
	150A			90	37				46							
	150B	150	210	120	145	39			48							
	150C			200	47	57										
	200A			90	44	52										
	200B	200	270	170	190	20			25			385	50	57		
	200C			250	54						65					
	250			250	330					170	40		240	560	445	70
	300	300	390	250	45	290						600	495		89	97
	300C			210											98	—
	330			330						430	210			50	320	25
	400	400	510	215	55	390				144	150					
	430	430	540	170		420				—	—					
	430C			250		—				—						
許容差		±2				±3			—							

呼び名		a	b	c	d ₁	d ₂	e	f	g	h	r	ℓ	n	参考重量 (kg)		
														片分岐	両分岐	
JIS 2種	K100	100	140	107	20	23	98	30	21	15	15	500	320	17	27	
	K130	130	170				128						335	18	28	
	K164	164	210	135	25	154	40	31	20	25			560	355	27	35
	K164C			210										30	41	
	K220	220	270	175	30	210	50	41	25		600	385		41	47	
	K220C			255								50		52		
	K280	280	330	180	35	270				700		445	50	61		
	K280C			255								56	66			
	K330	330	390	180	30	35	320	—	600		495	71	74			
	K330C			260							73	79				
	K450	450	510	235	35	40	440			700	605	105	107			
	K470C	470	540	265			460				620	115	116			
許容差		±2				±3				—						

※参考重量の記載のない製品は、2020年3月以降の取り扱いがありません。
 ※その他の製品も予告なく取り扱いを終了する場合があります。