



ケーブルトラフ (直線用)



形状

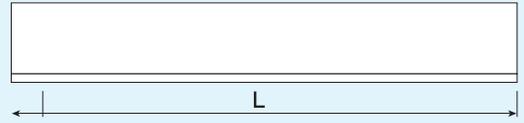

ふた

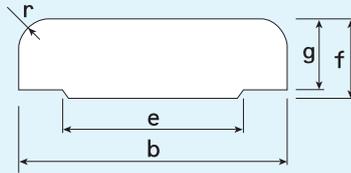

本体

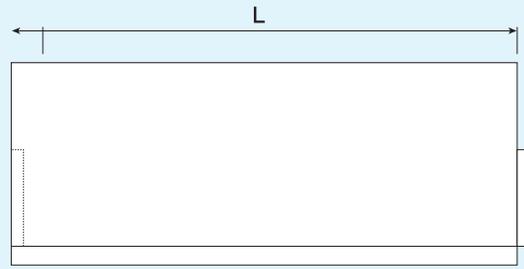

寸法表 [直線用]

単位: mm

呼び名	a	b	c	d	e	f	g	h	L	r	参考重量 (kg)	
											本体	ふた
JIS 1種	70	70	120	25	65	40	30	15	1000	15	16	5(×2)
	100	100	150		90						14	9
	120	120	170		75						10	11
	120C			150	15							
	150A	150	210	90	30	145	20	500	25	15	14	
	150B			120						16		
	150C			200						25		
	200A			90						20		
	200B	200	270	170	35	190	60	50	25	26	18	
	200C			250						33		
	250			250						330		170
	300	300	390	250	45	290	25	50	25	38	26	
	300C			250	47							
	330	330	430	210	50	320	70	60	50	50	32	
	400	400	510	215	55	390				58	37	
	430	430	540	170		60	540	70	60	50	82	55
	430C			250	70						37	
550	550	670	215	60	540	70	60	50	82	55		
620	620	820	370	100	610	90	80	—	195	90		
許容差	±2			±3			—	±3	—			

※呼び名70の本体は、L寸法500mmも取り扱っております。 ※呼び名100~620の本体は、L寸法1,000mmも取り扱っております (L寸法の許容差は±5mmになります)。

呼び名	a	b	c	d ₁	d ₂	e	f	g	h	L	r	参考重量 (kg)		
												本体	ふた	
JIS 2種	K100	100	140	107	20	23	98	35	26	15	15	8	4	
	K130	130	170				128					9	5	
	K164	164	210	135	23	25	154	40	31	20	25	15	9	
	K164C			210								19		
	K220	220	270	175	25	30	210	50	41	25	25	21	15	
	K220C			255								30		15
	K280	280	330	180	30	30	270	50	41	25	25	24	18	
	K280C			255								30		18
	K330	330	390	180	30	35	320	50	41	25	25	29	22	
	K330C			260								36		
	K450	450	510	235	35	40	440	460	—	—	±3	—	40	29
	K470C	470	540	265			460						51	31
	許容差	±2			±3			—	±3	—				

※呼び名K100~K164の本体は、L寸法1,000mmも取り扱っております (L寸法の許容差は±5mmになります)。