



ケーブルトラフ (勾配用)

形状



上り

ふた





下り



ふた

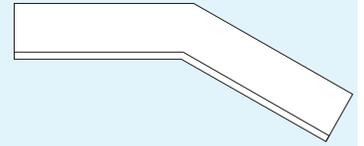

本体

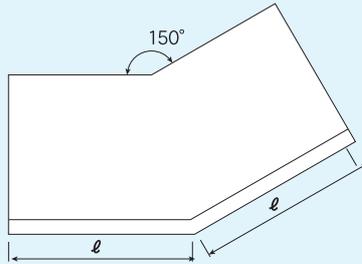

本体



8

ケーブルトラフ

寸法表 [勾配用]

単位: mm

呼び名	a	b	c	d	e	f	g	h	r	ℓ		参考重量 (kg)	
										上り	下り	上り	下り
JIS 1種	70	70	120	25	65	40	30	15	15	250	150	13	12
	100	100	150		90							—	—
	120	120	170		115							20	14
	120C			150	24	18							
	150A			90	26	19							
	150B	150	210	120	30	145	27	22					
	150C			200	31	27							
	200A			90	33	29							
	200B	200	270	170	35	190	38	34					
	200C			250	42	40							
	250	250	330	170	40	240	49	42					
	300	300	390	250	45	290	56	53					
	300C			250	50	320	60	63					
	330	330	430	210	50	320	—	—					
	400	400	510	215	55	390	79	79					
430	430	540	170	—		—							
430C			250	—		—							
許容差			±2			±3		—					

呼び名	a	b	c	d ₁	d ₂	e	f	g	h	r	ℓ		参考重量 (kg)		
											上り	下り	上り	下り	
JIS 2種	K100	100	140	20	23	98	30	21	15	15	250	150	13	10	
	K130	130	170			107							128	14	11
	K164	164	210			135							25	154	22
	K164C			210	23	154	24	22							
	K220	220	270	175	25	30	210	20	31	28					
	K220C			255			38	35							
	K280	280	330	180			270	41	35						
	K280C			255	25	30	45	39							
	K330	330	390	180	30	35	320	25	25	42					
	K330C			260			48	45							
	K450	450	510	235			50	41	25	25			61	56	
	K470C	470	540	265	35	40	460	69	63						
	許容差			±2			±3			—					

※参考重量の記載のない製品は、2020年3月現在、取扱いがありません。
 ※その他の製品でも、予告なく取扱いを終了する場合があります。