



ケーブルトラフ (分岐用)

形状

片分岐

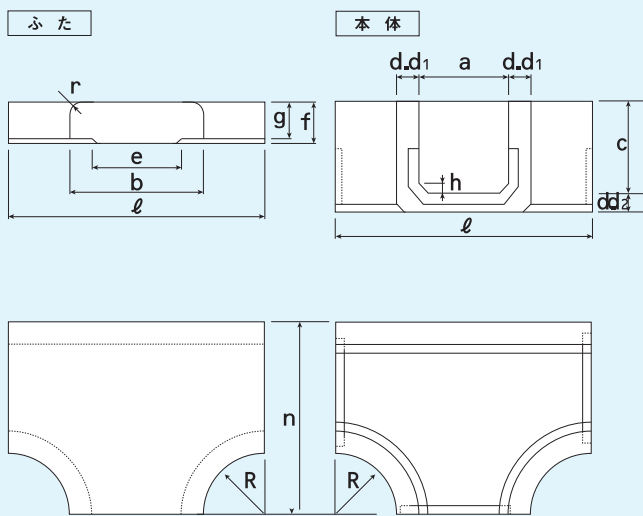

両分岐

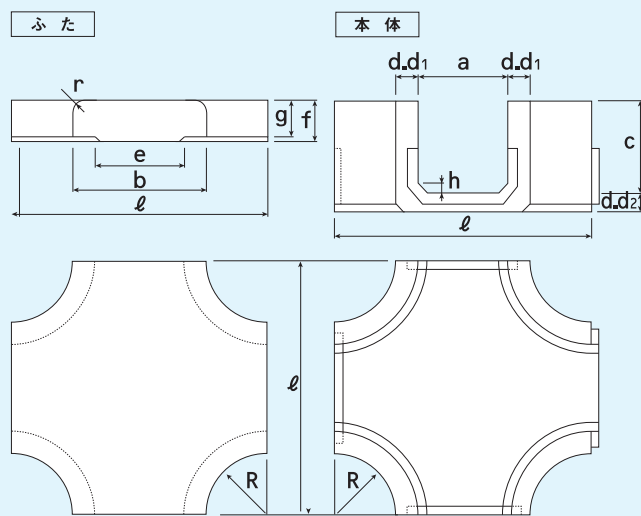

寸法表 [分岐用]

単位: mm

| 呼び名 | a | b | c | d | e | f | g | h | r | ℓ | n | 参考重量 (kg) | | | | |
|--------|------|-----|-----|-----|-----|-----|----|----|----|-----|-----|-----------|-----|-----|-----|-----|
| | | | | | | | | | | | | 片分岐 | 両分岐 | | | |
| JIS 1種 | 70 | 70 | 120 | 25 | 75 | 40 | 30 | 15 | 15 | 500 | 310 | 20 | 28 | | | |
| | 100 | 100 | 150 | | 145 | | | | | | | 90 | — | — | | |
| | 120 | 120 | 170 | | 75 | | | | | | | 115 | 28 | 38 | | |
| | 120C | | | 150 | | | | | | | | 33 | — | | | |
| | 150A | | | 90 | 30 | 145 | 60 | 50 | 20 | 25 | 700 | 335 | 37 | 46 | | |
| | 150B | 150 | 210 | 120 | | | | | | | | | 39 | 48 | | |
| | 150C | | | 200 | | | | | | | | | 47 | 57 | | |
| | 200A | | | 90 | 35 | 190 | 60 | 50 | 25 | 700 | 385 | 385 | 44 | 52 | | |
| | 200B | 200 | 270 | 170 | | | | | | | | | 50 | 57 | | |
| | 200C | | | 250 | | | | | | | | | 54 | 65 | | |
| | 250 | 250 | 330 | 170 | 40 | 240 | | | | | | | 560 | 445 | 70 | 76 |
| | 300 | 300 | 390 | 250 | 45 | 290 | | | | | | | 600 | 495 | 89 | 97 |
| | 300C | | | 250 | | | | | | | | | | | 98 | — |
| | 330 | 330 | 430 | 210 | 50 | 320 | | | | | | | | | — | — |
| | 400 | 400 | 510 | 215 | 55 | 390 | | | | | | | | | 144 | 150 |
| 430 | 430 | 540 | 170 | — | | | — | | | | | | | | | |
| 430C | | | 250 | — | | | — | | | | | | | | | |
| 許容差 | | | ±2 | | | ±3 | | | | — | | | | | | |

| 呼び名 | a | b | c | d ₁ | d ₂ | e | f | g | h | r | ℓ | n | 参考重量 (kg) | | | | |
|--------|-------|-----|-----|----------------|----------------|----|-----|----|----|----|-----|-----|-----------|-----|-----|-----|-----|
| | | | | | | | | | | | | | 片分岐 | 両分岐 | | | |
| JIS 2種 | K100 | 100 | 140 | 107 | 20 | 23 | 98 | 30 | 21 | 15 | 500 | 320 | 17 | 27 | | | |
| | K130 | 130 | 170 | | | | | | | | | | 128 | 18 | 28 | | |
| | K164 | 164 | 210 | | | | | | | | | | 135 | 23 | 25 | 154 | 40 |
| | K164C | | | 210 | | | | | | | | | | 30 | 41 | | |
| | K220 | | | 175 | 25 | 30 | 210 | 50 | 41 | 25 | 700 | 385 | 41 | 47 | | | |
| | K220C | 220 | 270 | 255 | | | | | | | | | 50 | 52 | | | |
| | K280 | | | 180 | | | | | | | | | | | | | |
| | K280C | 280 | 330 | 255 | | | 270 | | | | | | | 560 | 445 | 56 | 66 |
| | K330 | | | 180 | 30 | 35 | 320 | 50 | 41 | 25 | 700 | 25 | 25 | 71 | 74 | | |
| | K330C | 330 | 390 | 260 | | | | | | | | | | 600 | 495 | 73 | 79 |
| | K450 | 450 | 510 | 235 | | | | | | | | | | | | 440 | |
| | K470C | 470 | 540 | 265 | 35 | 40 | 460 | | | | | | | 700 | 620 | 115 | 116 |
| | 許容差 | | | ±2 | | | | ±3 | | | | — | | | | | |

※参考重量の記載のない製品は、2020年3月現在、取扱いがありません。
 ※その他の製品でも、予告なく取扱いを終了する場合があります。